Self Reflection

Prolog Database

- The working environment of Prolog, containing all loaded Prolog programs is called: the 'database'
- The database can be manipulated by the programs themselves
- Compare: Pascal program that modifies itself during execution

Prolog 'Database'

add new clauses ⇨

remove clauses ⇦

Prolog Database

```
parent(jim, bob).

pred(X,Y) :-
    parent(X,Y).
pred(X,Y) :-
    parent(X,Z),
    pred(Z,Y).
```

Prolog 'Database'

assertz: add to the end of a definition

assertz(parent(bob,ann)). ⇨

Prolog Database

```
parent(jim, bob).
parent(bob,ann).
pred(X,Y) :-
    parent(X,Y).
pred(X,Y) :-
    parent(X,Z),
    pred(Z,Y).
```

Asserting Clauses

Database

```
collect_data(stop).
collect_data(_) :-
    write('Next item: '),
    read(X),
    assertz(X),
    collect_data(X).

input_data :-
    collect_data(start).
```

```
name(peter).
age(35).
stop.
```

```
?- input_data.
Next item: name(peter).
Next item: age(35).
Next item: stop.
```

Database Manipulation

- Asserting (new) clauses:
  - assert(C): position C unspecified
  - asserta(C): at the beginning of the definition of the predicate
  - assertz(C): at the end of the definition of the predicate
- Deleting clauses:
  - retract(C): remove clause matching with C (top to bottom order)

Retracting Clauses

retract: remove from the beginning of the of definition

?- retract(parent(X,Y)).
X = jim
Y = bob
yes

Prolog Database

?- dynamic parent/2.
parent(jim, bob).
parent(bob,ann).
parent(john,pete).
parent(pete,linda).

Retracting Clauses

?- retract_all_facts(parent(X,Y)).
yes

Prolog Database

?- dynamic parent/2.
parent(jim, bob).
parent(bob,ann).
parent(john,pete).
parent(pete,linda).

```
retract_all_facts(X) :-
        retract(X),
        fail.
retract_all_facts(_).
```

Art of Prolog Programming

- Write *correct* programs: first think about how to represent the problem in Prolog (postpone all other issues to a later stage)
  - *declarative design correct*
  - *termination*
- *Readability: structure, layout* and *documentation*
- *Modifiability*
- Efficiency: add *cuts*, pay attention to *order*, choose efficient *representation*

Layout

```
/*************************************/
/* List manipulation programs.       */
/* merge(U, V, W): merges two ordered lists  */
/*************************************/

merge([], L, L) :- !.
merge(L, [], L).
merge([H1|T1], [H2|T2],[H3|T3]) :-
    H1 < H2, !,
    merge(T1, [H2|T2], T3).
merge(L1, [H1|T2], [H2|T2]) :-
    merge(L1, T2, T3).

append([], L, L).
append([H|T], U, [H|W]) :-
    append(T, U, W).
```

blank

no empty line

empty line

indentation

Bad Example

```
m(L1,L2,L3):-
L1=[], !, L3=L2,
L2=[], !, L3=L1,
L1=[X|T1], L2=[Y|T2],
(X<Y, !, Z=X, m(T1,L2,T3);
Z=Y, m(L1,T2,T3)),
L3=[Z|T3].
a([],X,X).
a([X|Y],V,[X|U]):-a(Y,V,U).
```

Applications of Prolog

- Artificial Intelligence:
  - natural language processing
  - symbolic reasoning systems, like expert systems and qualitative simulation
  - planning systems
- Bioinformatics:
  - recognition of DNA fragments
  - recognition of 3-D structure of proteins
- Specification languages: implementation of interpreters/compilers

Why is Prolog so Good for Solving AI Problems?

- Simple to *define* representations, e.g.:

```
description(car,
    isa(vehicle),
    [wheels(4),
     maxspeed(200)]).
```

- Easy to *manipulate* representations:

```
?- description(Object,
                isa(Object2),
                Property_list)
```

Prolog and Bioinformatics

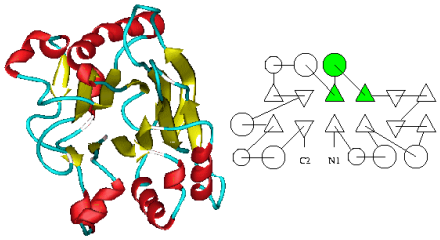

?- Find proteins with 2 x 2 linked circles

Qualitative Simulation

- Simulation of behaviour of system (e.g. circuit), using Prolog
- Example: multiplier-added




```
/* behaviour of */
/* multiplier   */

output(O,M) :-
    multiplier(M),
    input1(M, I1),
    input2(M, I2),
    O is I1 * I2.
```

Final Words

- Prolog also used for Internet-like applications:
  - as Prolog Web server
  - as language for client-side programs